

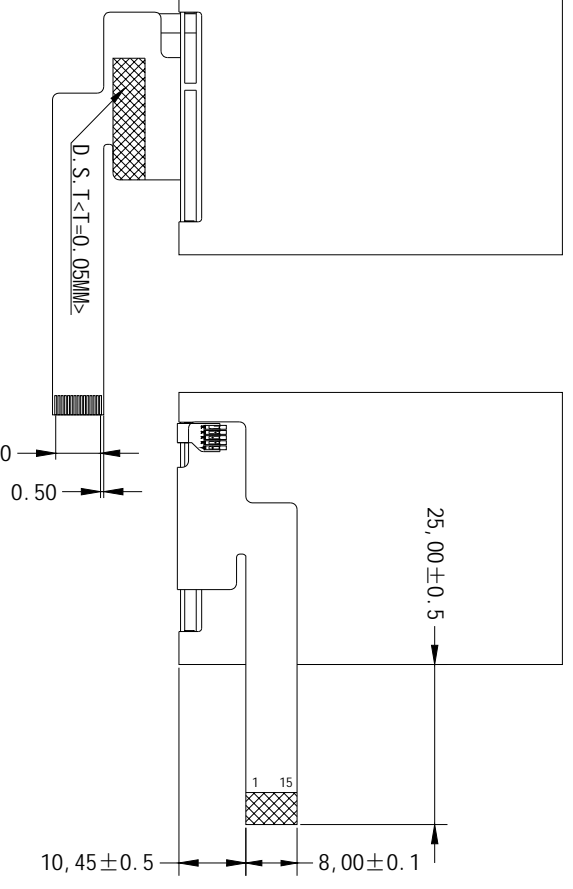
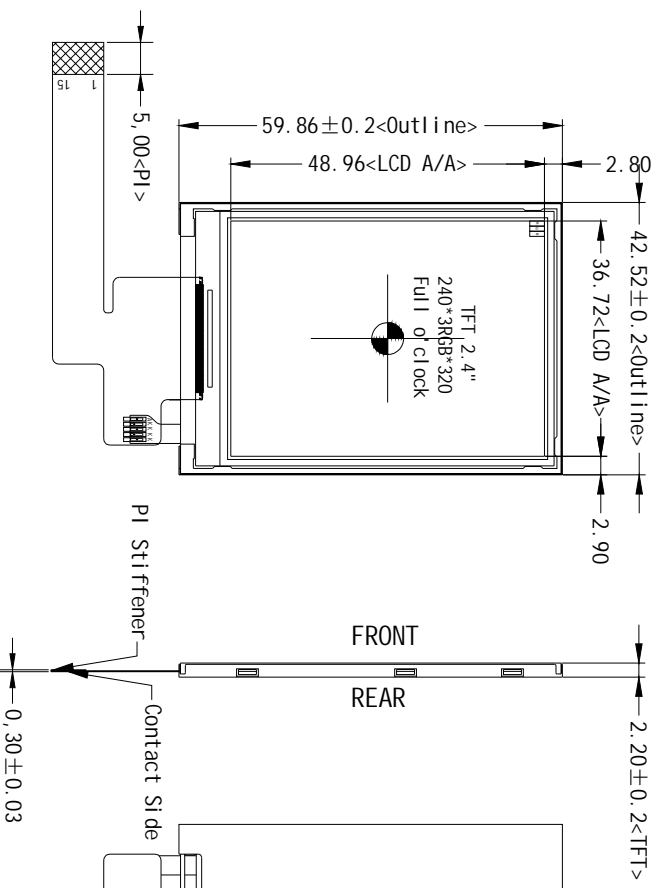


*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

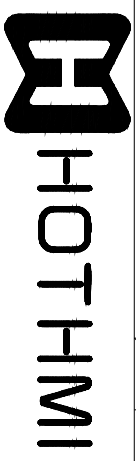

Pin	SIGNAL
1	TE
2	GND
3	DON
4	DOP
5	GND
6	DCKN
7	DCKP
8	GND
9	RESX
10	GND
11	IOVCC
12	VCI
13	GND
14	LED_A
15	LED_K

Item	Specification
*1. LCD Display Type	TFT/Transmissive/Normally Black/16.7M colors
*2. Viewing Direction	Full of Clock (U80/D80/L80/R80)
*3. Interface	Mipi_1L
*4. Operating Voltage	VCI=2.8V, IOVCC=1.8V(Typ)
*5. Operating Temp	-20° C~70° C
*6. Storage Temp	-30° C~80° C
*7. Driver IC	JD9852
*8. Backlight	WHITE VF=3.2V IF=100mA(Typ)
*9. LCM Brightness	800 cd/m² (Typ)



Dwg Title:		TFT-H024B120V1FT8N15	
Scale	Unit	Tol.	Date:
1:1	mm	±0.3	2020-11-23
Ver:	Drafter:	Li u	
V0			